




# CORNERCARE DRY WALL & THIN COAT COAT CORNER BEADS

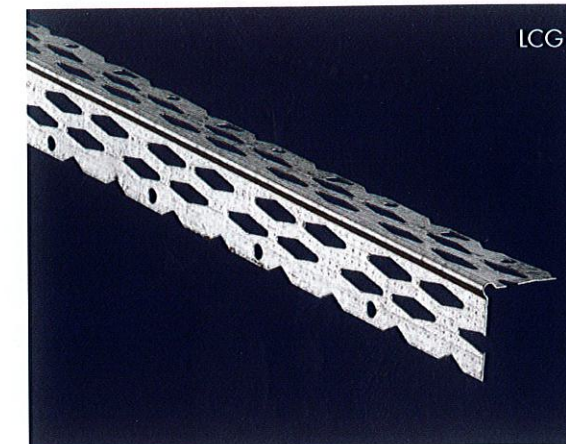

The Cornercare range of beads provide protection to the edges of the finish reducing the possibility of damage to the plasterboard. Where corners require an obtuse angle of 135 degrees, profile LCG135 can be used.

The profile is pre set at this angle and designed to speed up installation and protect corners usually exposed to high traffic areas. The Mini Mesh range of beads are designed for use when plastering slab, block work or rough surfaces which need a thin coat finish.

## INTERNAL PLASTERING

Galvanised Dry Wall and Thin Coat Beads are for use when plastering internally; manufactured to BS EN 13658 : Part 1 & 2 : 2005 from Galvanised Steel to BS EN 10346 : 2009 DX51D + Z275.

## EXTERNAL RENDERING

Stainless Steel Thin Coat Beads are recommended for use when applying a rendered polymer modified finish.

The Stainless Steel Beads meet with the requirements of BS EN 13658 : Part 1 & 2 : 2005.

All Stainless Steel Beads are manufacturing from BS EN 10088 - 4 grade 1.4301.


## FIXING ADVICE

Please ensure when fixing Stainless Steel Beads that Galvanised Nails are not used as this will lead to rust spots.


## GALVANISED STEEL

Galvanised Steel	Description	Length (m) 3.0	Qty/box
LCG	25mm Thin Coat Bead	•	50
LCG135	135° Thin Coat Bead	•	10
MMG	28mm Mini Mesh Bead	•	50
LMG	32mm Mini Mesh Bead	•	50


## LCG 25mm Long Wing Thin Coat Bead

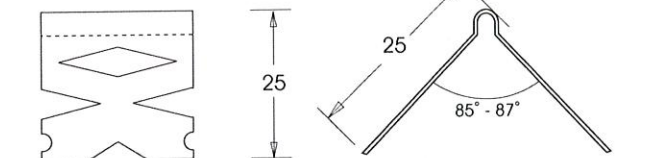


## LCG135 25mm Wing 135° Angle Thin Coat Bead

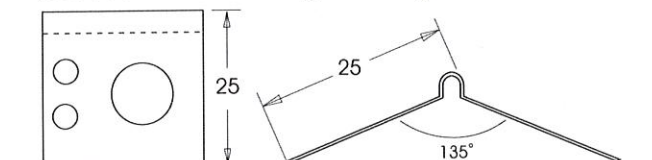

## MMG 28mm Mini Mesh Bead

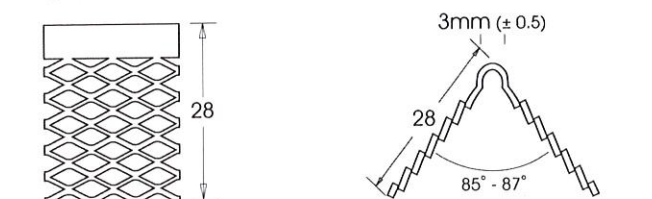

## LMG 32mm Mini Mesh Bead

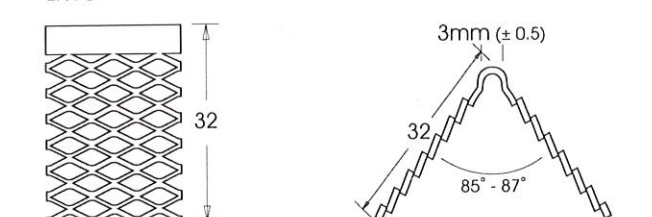

## COSHH CERTIFICATION

Copy data can be downloaded with product illustrations from our website.

## STAINLESS STEEL

Stainless Steel	Description	Length (m) 2.5	Qty/box
2274	25mm Thin Coat Bead	•	25