




CORNERCARE MOVEMENT BEADS

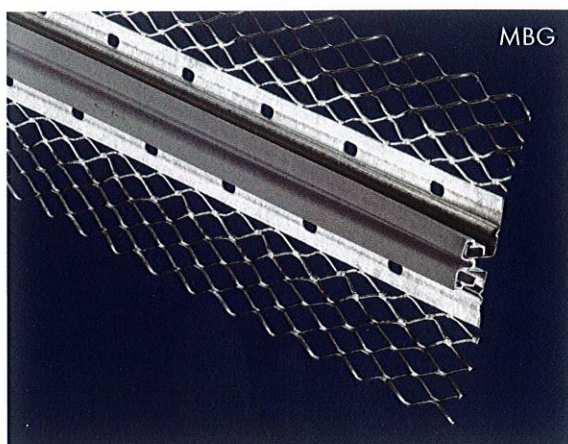

Cornercare Movement Bead provides a solution to thermal movement in plaster and rendered finishes. When placed vertically at predetermined centres provides a 6mm movement reducing the possibility of cracking. The face of the extrusion is covered by a Black PVC tape; to be removed when the plaster or render work has been completed.

INTERNAL PLASTERING

Galvanised Movement Beads are for use when plastering internally; manufactured to BS EN 13658 : Part 1 & 2 : 2005 from Galvanised Steel to BS EN 10346 : 2009 DX51D + Z275.

EXTERNAL RENDERING

Stainless Steel Movement Beads are recommended for use when applying an external render, polymer modified finishes or a sand cement finish.

The Stainless Steel Beads meet with the requirements of BS EN 13658 : Part 1 & 2 : 2005.

All Stainless Steel Beads are manufactured from BS EN 10088 - 4 grade 1.4301.

FIXING ADVICE

Please ensure when fixing Stainless Steel Beads that Galvanised Nails are not used as this will lead to rust spots.


COSHH CERTIFICATION

Copy data can be downloaded with product illustrations from our website.


PVC Noses available in White, Ivory, Grey, Beige & Terracotta

GALVANISED STEEL


Galvanised Steel	Description	Length (m) 3.0	Qty/box
MBG 3010	10mm Movement Bead	•	10
MBG 3013	13mm Movement Bead	•	10
MBG 3016	16mm Movement Bead	•	10
MBG 3019	19mm Movement Bead	•	10

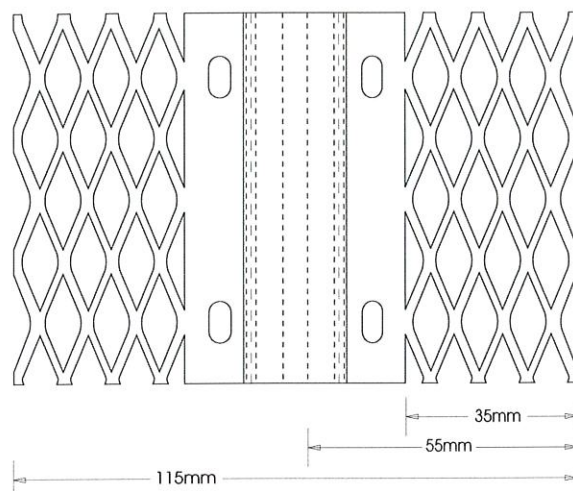


MBG3010/MBS3010 10mm Movement Bead

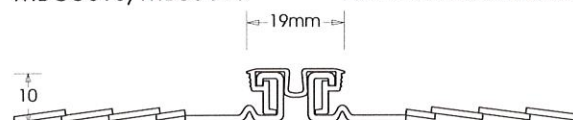


MBG3013/MBS3013 13mm Movement Bead

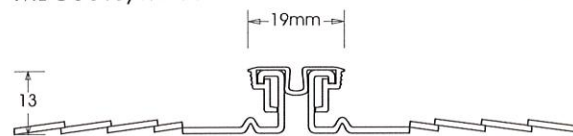

MBG3016/MBS3016 16mm Movement Bead

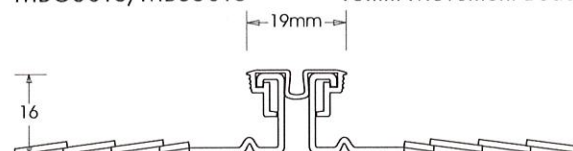

MBG3019/MBS3019 19mm Movement Bead

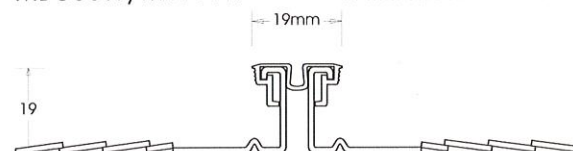

STAINLESS STEEL

Stainless Steel	Description	Length (m) 3.0	Qty/box
MBS 3010	10mm Movement Bead	•	10
MBS 3013	13mm Movement Bead	•	10
MBS 3016	16mm Movement Bead	•	10
MBS 3019	19mm Movement Bead	•	10