
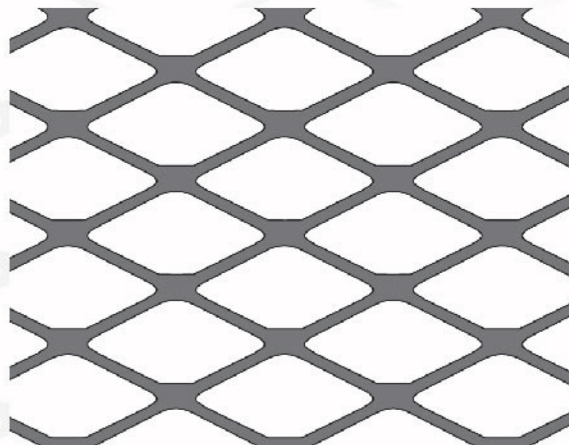


SHABAK EXPANDED METAL LATH

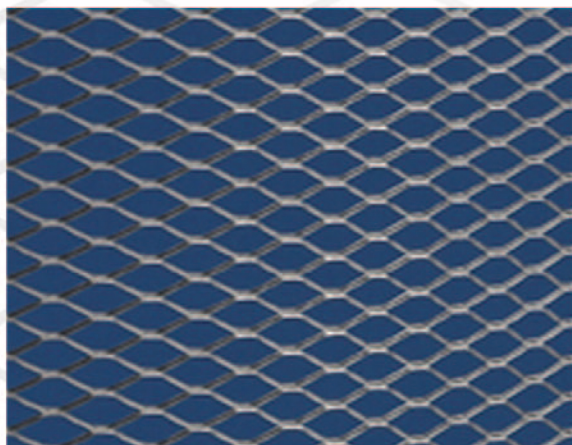

SHABAK Expanded Metal Lathing and Mesh products are used to provide a suitable key for plaster and rendered finishes including joint and crack reinforcement and general refurbishment.

Easy to install and fix, expanded Metal can be used to provide reinforcement for curved surfaces and steel columns where fire protection is required.

Areas such as suspended ceilings where longer spans are required between steel supports

SHABAK expanded metal lath is manufactured in accordance with BS 1369 : Part 1 : 1987.

INTERNAL & EXTERNAL USE

Galvanised Lath is used for internal & external plaster work; manufactured from galvanised steel to BS EN 10346 : 2015 DX51D + Z275.

INTERNAL & EXTERNAL USE

Stainless steel lath is recommended for use in areas with high humidity, moisture. All stainless steel lath products are manufactured from BS EN 10088 – 4 grade 1.4301.

FIXING ADVICE

Please ensure when fixing stainless steel lath that galvanised nails are not used as this will lead to rust spots.

Reference Number	Nominal Kilos per m2	Size (Roll Width x Length)
GALVANISED STEEL METAL LATH SHEETS		
SESHEET	0.500	2440mm x 600mm
SESHEET	0.750	2440mm x 600mm
SESHEET	0.910	2440mm x 600mm
SESHEET	1.100	2440mm x 600mm
SESHEET	1.200	2440mm x 600mm
SESHEET	1.360	2440mm x 600mm
SESHEET	1.610	2440mm x 600mm
SESHEET	1.810	2440mm x 600mm
STAINLESS STEEL METAL LATH SHEETS		
ELS426	1.10	2440mm x 600mm