



GALVANIZED PLASTER STOP BEAD

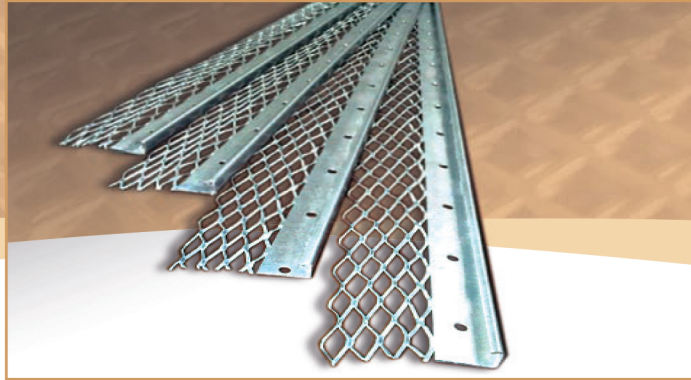

MATERIAL SPECIFICATION:

Hot Dipped Galvanized steel conforming to JIS G3302 /98 SGCC, Zinc Coating Z-275 (or) ASTM A653, Zing Coating G90

Plaster Stop Bead is used to provide better finishing to the edges of plaster work. It ensures protection against chipping and cracking

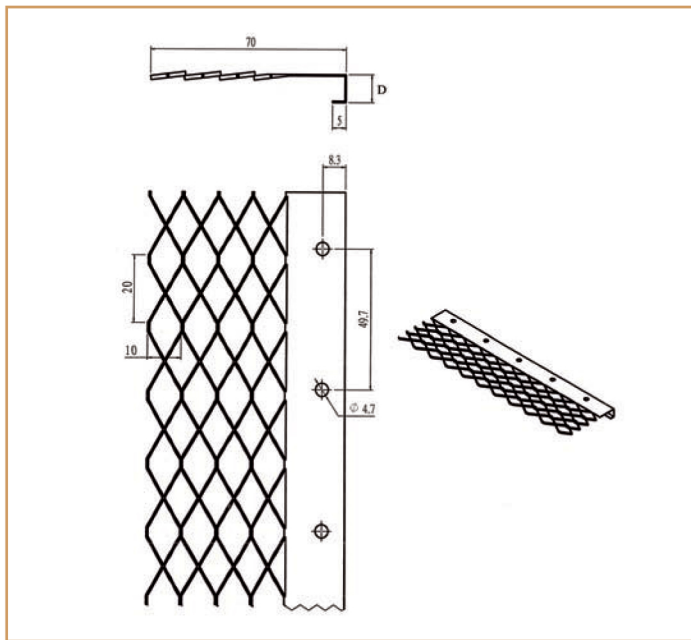

Item	Material	D	Length	Pcs / pack
PS 10	Galv. Steel	10 mm	2.70 / 3.00 M	25 or 50
PS 13	Galv. Steel	13 mm	2.70 / 3.00 M	25 or 50
PS 16	Gal . Steel	16 mm	2.70 / 3.00 M	25 or 50
PS 19	Gal . Steel	19 mm	2.70 / 3.00 M	25 or 50