



## GALVANIZED STEEL TIES - Building Accessories

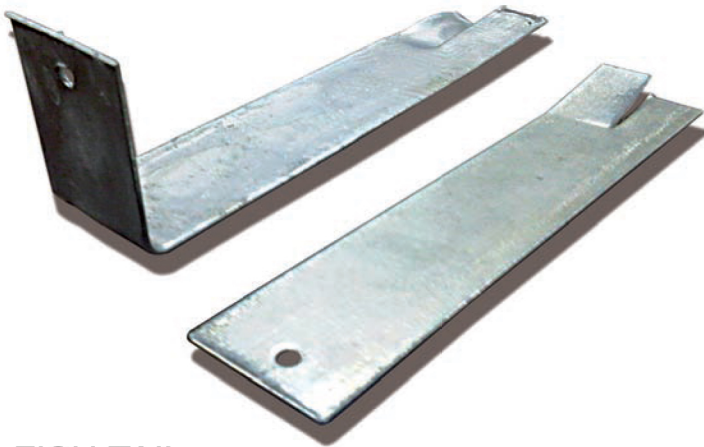

FISH TAIL

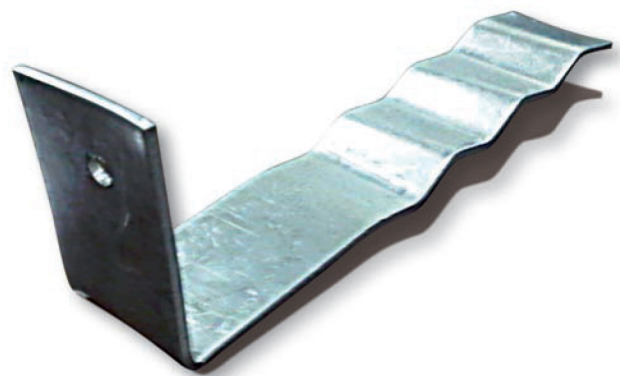

DOVE TAIL


### MATERIAL SPECIFICATION:

Hot Dipped Galvanized steel conforming to JIS G3302 /98 SGCC (or)  
ASTM A653, Zinc Coating Z245 to Z460

Galvanized steel ties are used for anchoring brick work, concrete wall, stone, marble, timber etc.

| Thickness |       |       | Width |      |      | Length |       |       |
|-----------|-------|-------|-------|------|------|--------|-------|-------|
| 1.5mm     | 2.0mm | 3.0mm | 15mm  | 20mm | 25mm | 150mm  | 200mm | 250mm |

### BUTTERFLY TIES

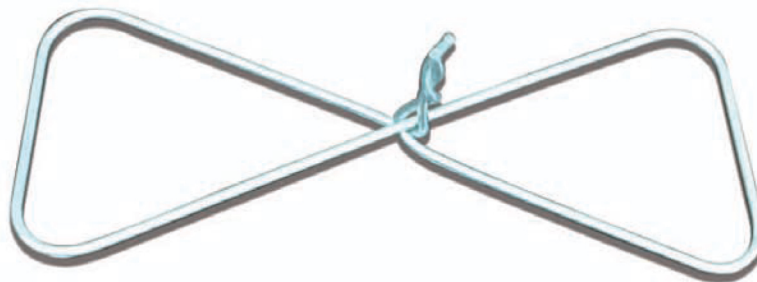

| Thickness |  | Width |  | Length |       |       |
|-----------|--|-------|--|--------|-------|-------|
| 3.0mm     |  | 80mm  |  | 200mm  | 250mm | 300mm |